DOOR SEALS & PROOFING GUIDE




Raxit Seals eliminate the risks of rodents and pests passing through the gaps of doors. The patented seals are manufacturered in a flexible and durable material called Santoprene. The seals are reinforced with stainless steel wires which make it nearly impossible for rodents and other pests to pass through it.

EASY TO INSTALL, THE RAXIT SEALS WORK WITH:





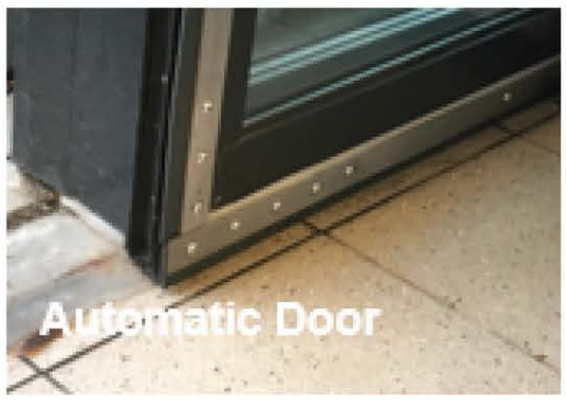



Benefits:

- Low Cost Solution.
- Easy to Install and Maintain.
- Effective against most pests and all rodents.
- Easy to Clean.

Distributed by:


GARRARDS
"SERVICE WITH INTEGRITY"

RAXIT® RTU
Made in Denmark
Doors and sliding doors
- Ready To Use
- Easy to Install


Raxit
For further information visit raxit.net



- Self-Drilling Stainless Steel Screw Type nr: A2 4,8 mm x 32 or Blind Rivet alu 4,8 x 14 mm
- Raxit® Ready-To-Use seal 1 m / 3 m
- Measuring tape
- Iron Saw
- Snipping Tool
- Power Drill



1 Measure the Door



2 Cut the Raxit® Ready-To-Use




3 Push the Santoprene tightly into the Aluminum Strip




4 Place and Peel the double-sided tape




5 Place the Raxit® Ready-To-Use on the door – and adjust to surface



6 Adjust the Santoprene to the surface



7 Attach with screws or blind rivets



The terrain in front of the door should preferably fall away from the door or have a max increase of 1 cm/m

Raxit Ready-To-Use



(Suitable for most doors and residential use)

Single Doors
Double Doors
Automatic Doors

Available in (lengths): 1m, and 3m

Available in (heights): 20mm, 30mm and 40mm

PN: RAX/1M.20 - 1m/20mm
PN: RAX/1M.30 - 1m/30mm
PN: RAX/1M.40 - 1m/40mm
PN: RAX/3M.20 - 3m/20mm
PN: RAX/3M.30 - 3m/30mm
PN: RAX/3M.40 - 3m/40mm

Raxit Door Seal & SS Shielding Strip

(Suitable for industrial use)

Single Doors
Double Doors
Automatic Doors

Available in (lengths): 1m, 3m, 12m and 25m

Available in (heights): 75mm

PN: RAX/DS/1M - 1m
PN: RAX/DS/3M - 3m
PN: RAX/DS/12M - 12m
PN: RAX/DS/25M - 25m

Raxit Stationary Seal

(Suitable for stationary building compoents)

Fences & Gates
Gaps in Concrete
Holes in Wooden Construction

Available in (lengths): 1m, 3m, 12m and 25m

Available in (heights): 75mm

PN: RAX/S/F/1 - 1m
PN: RAX/S/F/3 - 3m
PN: RAX/S/F/12 - 12m
PN: RAX/S/F/25 - 25m