BIRD SPIKE 2000 POLYCARBONATE™

"The Original" #1 Polycarbonate Bird Spike!



Labor Saver

Patented

LONGEST GUARANTEE!






Virtually Invisible!

BIRD SPECIES:	Pigeons, Seagulls or Larger Birds.
BIRD PRESSURE:	Light to Heavy.
WHERE TO USE:	Ledges, I-Beams, Parapet Walls, Conduit, Signs.
MATERIAL:	U.V. Protected Polycarbonate Plastic. One-Piece Rigid Construction (Non-Conductive).
WARRANTY:	**5-Year Guarantee!**

ADVANTAGES / BENEFITS

- **Lowest Cost Bird Spike Deterrent!**
- **Longest Guarantee - 5 Years!**
- **No Maintenance / Super Easy Installation!**
- **Non-Conductive! - Will Not Interfere with Electrical or Communication Transmissions!**
- **UNBREAKABLE...Rigid / Super Strong!**
- **Available in 3", 5", and 7" Widths!**
- **U.V. Protected / Sun & Weatherproof - Not Affected by Extreme Temperatures (+310˚ F to -200˚ F)!**
- **Easy to Install and Maintain - Rigid One-Piece Construction!**
- **2-Foot Lengths - Cuts Labor Time in Half!**
- **Available in a Variety of Standard Colors, Including White, Tan, Grey, Black, Brown, Brick Red...and CRYSTAL CLEAR!**


As Tough As "Steel" At Half The Price!

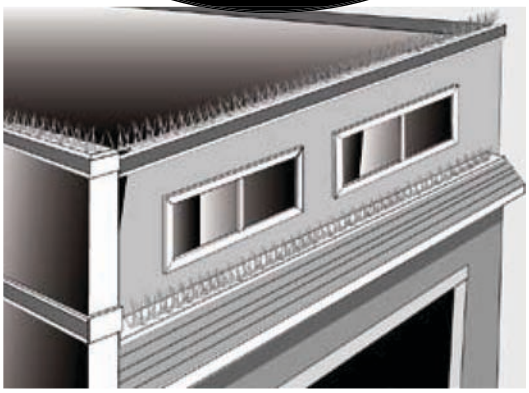


Ledges:
Most often pest birds congregate on ledges and roof tops. Install Bird Spike 2000 to keep birds from creating unsightly messes.



Conduit & Pipes:
Bird Spike 2000 can be attached to wires, conduit, gutters and pipes by using common hose clamps, nylon ties or wire lashings.



I-Beams

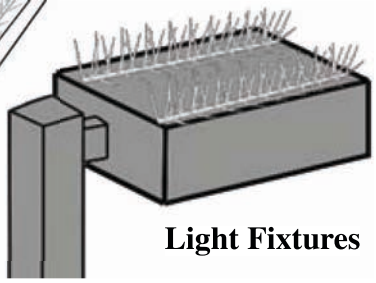

Light Fixtures

Keep Job Costs Down!


We are The EXPERTS in Bird Control, since 1992!


THE LOWEST COST BIRD SPIKE...PERIOD!


"THE ORIGINAL" BIRD SPIKE 2000 ORDERING INFORMATION

CALL FOR VOLUME DISCOUNTS!


- All Product is Packaged 50' per Box (25 - 2' Sections per Box.)
- Minimum Order is 50' • All Orders Must be in 50' Increments.
- For Ledges or Areas of Coverage more than 8", Use Multiple Rows of Bird Spike 2000.

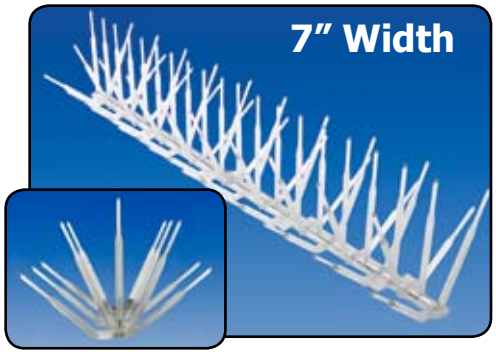


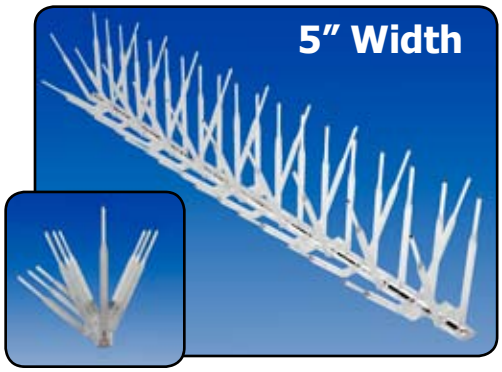


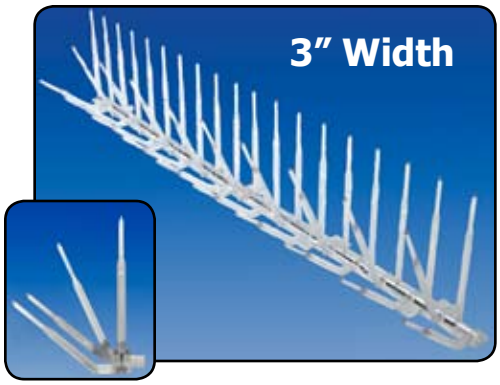




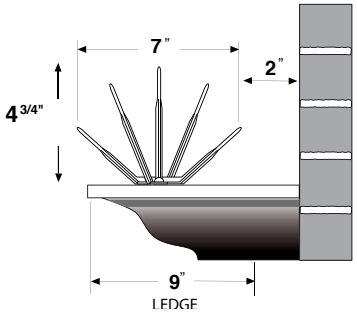





Underside View

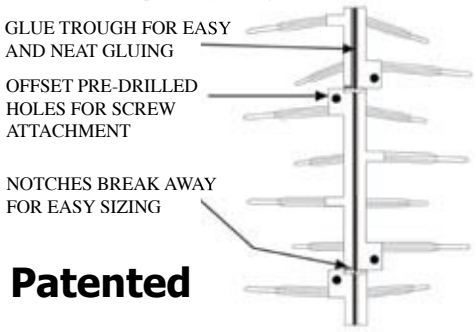

Patented

Bird Spike 2000-7"

PN# BBG2000-7

- Product Width (Actual): 7"
- Area of Coverage: 6" - 9" Widths
- 2 ft. Sections / 50' per Box

Bird Spike 2000-5"

PN# BBG2000-5

- Product Width (Actual): 5"
- Area of Coverage: 5" - 7" Widths
- 2 ft. Sections / 50' per Box

Bird Spike 2000-3"

PN# BBG2000-3


- Product Width (Actual): 3"
- Area of Coverage: 1" - 5" Widths
- 2 ft. Sections / 50' per Box

Adhesive

PN# ADE61

- Clear Construction Grade Adhesive
- One Tube Covers 25' of Product
- Tubes Sold Individually
- Excellent for Use in Extreme Climates - Hot or Cold

* Specify Color When Ordering

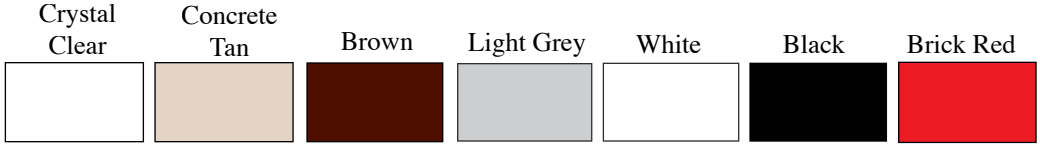

Standard Colors

Simply the Best!

BIRD•B•GONE INC.

Made in the USA!

Architectural Specifications

Useful CAD Details Available at our Website www.birdbgone.com

SPECIFICATIONS – BIRD SPIKE 2000

"The Original" Polycarbonate Bird Spike

PART 1 – GENERAL

1.1 SUMMARY

A. Design Requirements: Select appropriate size and system as determined by site conditions to prevent birds from landing and roosting on specified surfaces.

1.2 QUALITY ASSURANCE

A. Single Source Responsibility: Furnish products from one manufacturer for entire project.

B. Obtain all technical information from the manufacturer.

C. Utilize Bird-B-Gone Authorized Installers who are certified in Bird-B-Gone product installations. Proof of Certification required.

D. Installer shall visit the site to gather all information of existing site conditions.

1.3 SUBMITTALS

A. Product Data: Submit manufacturer's descriptive literature and product specifications for each product including catalogs, installation instructions and other descriptive material.

B. Provide Warranty on material and installation.

C. Provide samples of each type of spike excluding proposed fastening methods.

D. Provide statement by official indicating that they are a Certified Installation Company.

1.4 PRODUCT HANDLING

A. Protect Bird-B-Gone, Inc. products from damage before, during and after the installation.

1.5 PROJECT CONDITIONS

A. Coordination: Furnish samples of system(s) so installation can be coordinated with existing conditions and within on-site conditions.

B. Visit site and field-measure prior to fabrication and delivery of materials.

1.6 WARRANTY

A. Product shall carry a minimum 5-year guarantee against U.V. breakdown.

B. Installation shall be guaranteed for 2 years.

PART 2 – PRODUCTS

2.1 ACCEPTABLE MANUFACTURER

Manufacturer:
Bird-B-Gone, Inc.
Bird Spike 2000
23918 Skyline
Mission Viejo, CA 92692
Tel: 800-392-6915 or 949-472-3122
Fax: 949-472-3116
P.O.C.: Bruce Donoho

2.2 PRODUCT DESCRIPTION

A. Model Designation:
1. SPIKE 2000: 3", 5" or 7"
a. Width of Coverage:
i. Spike 2000-3": 1" - 5" widths
ii. Spike 2000-5": 5" - 7" widths
iii. Spike 2000-7": 7" - 10" widths
b. Height: 4-3/4"
c. Base Strip: Flexible
i. "Glue trough" feature (underside) for ease of attachment with adhesive.
ii. Offset pre-drilled holes, for ease of attachment with screws and/or adhesive.
d. Length: 2 ft. sections
e. Packaging: 50ft./Box…25-2ft. sections/box.
f. Color: As designated by the project specifications.
g. Number of Rows: As determined by the manufacturer and based on project conditions.
h. Mounting System: As determined by the manufacturer and based on project conditions.

2.3 MATERIALS

A. Material: U.V. Stabilized Polycarbonate. Heat and weather resistant (+310 Deg. F. to –200 Deg. F.) Non-conductive and will not interfere with electronic security systems or transmissions.

B. Construction: Rigid one-piece construction, available in 7 standard colors including Crystal Clear.

C. Adaptation: "Break Away" points are located between each set of screw holes. Tin snips, hacksaw, etc. can also be used to cut the product to the desired length.

2.4 MOUNTING SYSTEMS

A. Wood: Use #8 wood screws. For every 2 ft. section of Bird Spike 2000, ten (10) #8 wood screws are required.

B. Steel, Brick, Stone or Concrete: Use an outdoor construction adhesive that is non-silicone based. Purchase from the manufacturer or call for recommended adhesives. If mounting surface warrants, screw or bolt down Bird Spike 2000 in conjunction with using the adhesive.

C. Pipes or Poles: Ty-Wraps can be used alone or in conjunction with an outdoor construction adhesive that is non-silicone based. For U.V. protected Ty-wraps, purchase directly from the manufacturer or call for recommended products.

PART 3 – EXECUTION

3.1 EXAMINATION

A. Examine the installation area and note any detrimental or hazardous work conditions. Notify contracting officer or inspector of the detrimental work conditions.

B. Do not proceed with installation until conditions are corrected.

3.2 SURFACE PREPARATION

A. Surface should be thoroughly cleaned and free of bird droppings, nesting materials, rust, peeling paint or other debris.

B. Remove or repair articles that may damage Bird Spike 2000 after installation, including overhanging foliage, brush and loose parts on the structure.

3.3 INSTALLATION

A. Install Bird Spike 2000 as recommended by the manufacturer.


B. Bird Spike 2000 should be installed correctly, covering the entire depth of the surface, not just the perimeter.
1. Follow the contours and angles closely; cut or break away to fit properly.
2. Space materials in accordance with manufacturer's recommendations.

3.4 INSPECTION


A. Visually inspect Bird Spike 2000 for any signs of poor installation, including loose screws, fasteners and unremoved debris.

B. Immediately correct and repair as necessary.

END OF SPECIFICATIONS

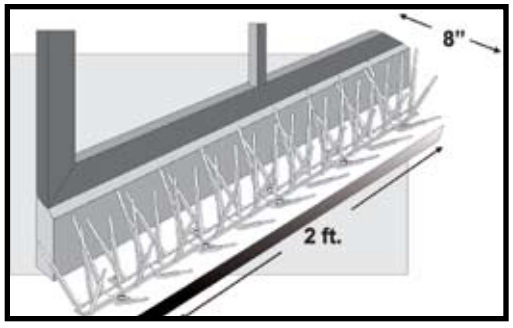

Bird Spike 2000 has the Widest Coverage of Any Plastic Spike…8".

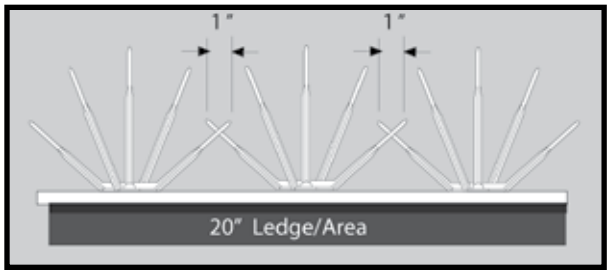

For Wide Areas and Heavy Infestations: Intertwine Spike with 1" overlap on both Vertical and Horizontal Surfaces.